



宾士动力
BS POWER

GB/T9001-2008 idt ISO9001:2008
GB/T24001-2004 idt ISO14001:2004



Cummins Diesel Generator Set

Model No.: BCM330

Standby Power 330KW/413KVA



GUANGDONG BINSHI POWER TECHNOLOGY CO., LTD.

Add: Shangtun industrial district, Liaobu Town, Dongguan City, Guangdong, China

Tel: 0769-88992216 Fax: 0769-82310548

www.bs-power.com

Powered by

Cummins: NTAA855-G7

Standby 413KVA at 50Hz, 400V



Genset Technical Data:

| | |
|--------------------------------------|--------------------------|
| Genset Model: | BCM330 |
| Prime Power: | 300 KW /375KVA |
| Standby Power: | 330 KW / 413KVA |
| Frequency/Speed: | 50Hz/1500rpm |
| Rated Voltage: | 400V |
| Power Factor: | 0.8 |
| Phase: | three-phases, four-wires |
| Fuel consumption (100% load): | 85.4L/h |
| Oil tank: | 600 L |
| Engine: | Cummins |
| Alternator: | Marathon |
| Controller: | DeepSea |
| Dimensions (LxWxH): | 3000x1600x1000 mm |
| Net Weight: | 3600 kgs |

- (1) PRP: Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO8528-1. A 10% overload capability is available for a period of 1 hour within 12-hour period of operation. In accordance with ISO 3046-1.
- (2) ESP: The Standby Power Rating is applicable for supplying emergency power in variable load applications for up to 200 hours per year in accordance with ISO8528-1. Overload is not allowed.

Advantages:

1. **Unique engine injection pressure and construction:** Unique Cummins fuel system, 4 valves per cylinder, direct injection, turbocharged & intercooled.
2. **Advanced production technology:** higher strength and reliability because of alloy cast iron cylinder body & cover and complete equilibrium structure crankshaft.
3. **Advanced electrical control technology:** full control system design, use advanced ECU intelligent control patch, with real-time monitoring for engine. With fault reserve function.
4. **High operating reliability:** high strength cast cylinder and crankcase provide solid crankshaft support and reduce weight. The engine has enough safety power reserve to cope with 50% over-speed.
5. **Economy:**
 - 1) The engine set consumes less fuel and oil, so the operating costs are low, fuel consumption rate is 195-2D8 g / kWh.
 - 2) With the world's longest working time before first overhaul.

Cummins Engine

Model: NTAA855-G7

Manufacture: CCEC, China

General features:

- ◆ Water cooled, turbocharged & intercooled.
- ◆ Direct injection fuel system
- ◆ 24V D.C starter
- ◆ Cooling radiator and fan with safety guard.
- ◆ Replaceable fuel filter, oil filter and dry element air filter.
- ◆ Fuel and water separator as optional.



Main Technical Data:

| | |
|----------------------------------|--|
| Prime/standby power: | 343KW/377KW |
| Rated Voltage: | 400V |
| Frequency/Speed: | 50Hz/1500rpm |
| Cylinders no. & Type: | 6 cylinders in line, 4-cycle |
| Aspiration: | Turbocharging, Air to Air intercooling |
| Bore x Stroke: | 140x152mm |
| Displacement: | 14 L |
| Compression ratio: | 14: 1 |

Exhaust System

| | |
|---------------------------------------|--------|
| Max. back pressure | 10 kPa |
| Standard exhaust pipe diameter | 127 mm |

Air Intake System

| | |
|---|----------|
| Max. air intake resistance | |
| --Dirty filter | 6.22 kPa |
| --Normal air cleaner and clean filter | 3.74 kPa |
| Minimum Dirt Holding Capacity | 53 g/L/s |
| Maximum Allowable Intake Air Temperature | 17℃ |

Lubrication System

| | |
|--|-------------|
| Oil pressure | |
| ----Low idle speed | 103 kPa |
| ----Rated speed | 241-345 kPa |
| Maximum Oil Consumption | 0.24L/h |
| Max. oil temperature permitted in oil pan | 121℃ |
| Oil pan capacity (Max/Min) | 28.4/36 L |
| Lubrication system Min. capacity (oil pan + oil filter) | 38.6 L |
| Usage inclining degree permitted (any direction) | 38℃ |

Fuel System

| | |
|----------------------------------|-----------------------------|
| Fuel injection pump model | Direct injection Cummins PT |
| Maximum Fuel Pump Supply | 371L/h |
| Fuel Rail Pressure | 1028kPa |
| Maximum Fuel Temperature | 71℃ |

Cooling System

| | |
|--|----------|
| Coolant capacity--engine only | 20.8 L |
| --With radiator | 60.6 L |
| --With Heat Exchanger | 49.2 L |
| Max. coolant cycling resistance exterior engine | 41 kPa |
| Thermostat adjusting temperature (range) | 82-94℃ |
| Min. opening pressure of radiator cap | 48.2 kPa |
| Max. coolant temperature permitted | 96℃ |
| Maximum Top Tank Temperature | 100℃ |
| Minimum Top Tank Temperature | 71℃ |

Electric System

| | |
|--|--------|
| Starter | 24V |
| Battery charging system | 35A |
| Max. starting circuit resistance | 0.002Ω |
| Min. battery capacity_ -12℃ (CCA: Cold Cranking Ampere) | 900CCA |

Dimension & Weight

| | |
|----------------------------|-----------------|
| Dimensions (LxWxH): | 1880x783x1597mm |
| Weight | 1300kg |

Marathon Alternator

Model: MP-300-4A

Origin: Shanghai, China

General Features:

- ◆ Brushless, self-exciting
- ◆ AC excitation, rotating rectification tube
- ◆ Class 'H' insulation
- ◆ Stator grease insulation covered
- ◆ Automatic Voltage Regulator Self regulating
- ◆ Rotator and excitation high polymer
- ◆ With fan cooling
- ◆ Resist the corruption of oil and acid.
- ◆ Resist humid grease
- ◆ High-quality lubrication sealed long-time bearing



Main Technical Data:

| | |
|---|---|
| Prime power | 300KW |
| Rated Voltage: | 400V |
| Frequency/Speed: | 50Hz/1500rpm |
| Power Factor: | 0.8 |
| Efficiency: | 93.2% |
| Design: | Brushless single bearing, revolving field |
| Regulator: | AVR self-regulation |
| Stator: | 2/3 winding pitch |
| Rotor: | Single bearing , flexible disc |
| Exciter Type: | Brushless excitation |
| Windings: | 100% copper |
| Voltage regulation: | $\geq \pm 10\%$ |
| Short-circuit current: | 300% (3in) 10S |
| Overspeed: | 2250min-1 |
| Indication of protection: | IP21/IP23 |
| Insulation class | H |
| Total Harmonic Distortion: | No load <5%. |
| Telephone Influence Factor(TIF): | <50 |
| Telephone Harmonic Factor(THF): | <2% |
| Dimensions (LxWxH): | 1124x603x855mm |
| Weight | 940kg |

DeepSea Control System

Model: DSE7320

Origin: Shanghai, China



Operating Environment:

| | |
|-------------------------------|--|
| Operating temperature: | -20℃~60℃ |
| Relative humidity: | 95% |
| Operating voltage: | DC24V(range: 18-30V, withstand voltage: 50V/5mm) |

General Features:

- ◆ Compact size, reliable performance, easy to operation.
- ◆ Automatic detection function and multi-protection function, protect the generator operating safety and steady.
- ◆ Multi-interface display generator's working and alarm condition, visualized and clear to watch.
- ◆ Microcomputer control panel: set parameters such as input, output, alarm and time delay.
- ◆ Multiple operating modes: maintenance mode, manual mode and automatic mode.
- ◆ Start automatically when main supply is abnormal (over-tension, voltage too low, voltage loss).
- ◆ LCD can show all the parameters for the diesel generator.
- ◆ Protective cutoff function when the generator set failed.
- ◆ LCD alarm display, sound-light alarm control output.
- ◆ Manual/automatic/three-remotes function and electric supply/generate electricity automatic switch on-off control.
- ◆ Support RS232/RS485 communication mode (MODBUS protocol).


Protection:

- ◆ High/low voltage & frequency.
- ◆ Revolving speed lack of /exceed.
- ◆ Low oil pressure.
- ◆ High water temperature.
- ◆ Over current/ short trouble, emergency stop

DeepSea Paralleling Module (Optional)

Full Automatic Paralleling Control Cabinet

- ◆ Self-starting, safety protection, alarm.
- ◆ It can realize parallel operation by manual or automatic.
- ◆ Self-load distribution.
- ◆ Self- reactive power distribution.
- ◆ Self-put into or logout gen-set per load.
- ◆ It can at most control 16 sets gen-set parallel operation.
- ◆ Provide open type MODBUS protocol, RS232 and RS485 communication interface for monitoring function.
- ◆ It has manual, automatic, three-remote function, monitor by computer to reach three – remote.

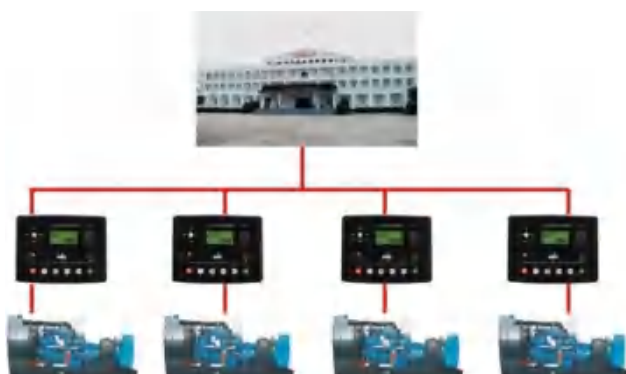

Features:

- ◆ Sheet steel lockable enclosure with hinged door,
- ◆ Removable base gland plate for cable entry/exit on all ratings
- ◆ Voltmeter (0-500) across L1-L2 on load output
- ◆ Load transfer push buttons
- ◆ 22.5mm multi-head LED indicators for “mains on load” and “generator on load”
- ◆ Interface to BS Power generator control panel
- ◆ Suitably rated earth bar


Protection:

- ◆ High/low voltage & frequency.
- ◆ Revolving speed lack of /exceed.
- ◆ Low oil pressure.
- ◆ High water temperature.
- ◆ Over current/ short trouble, emergency stop

Circuit Breaker

| | |
|------------------|----------|
| Brand: | Mingyang |
| Capacity: | 630A |

Genset Outlook

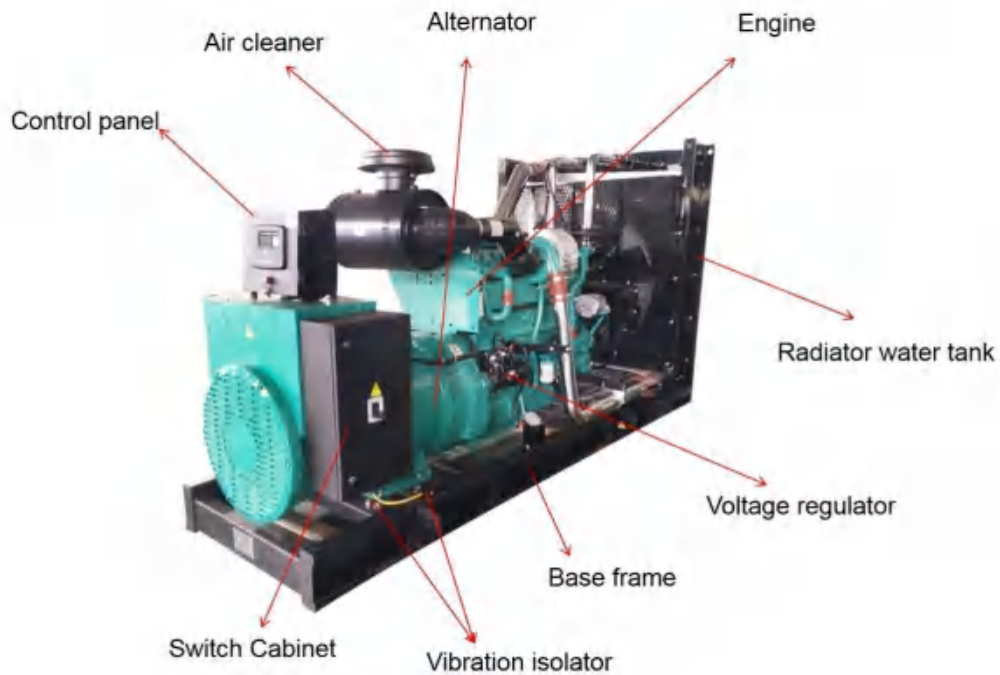

Standard Supply Scope:

- ◆ Drive fan for engine and 40°C heat radiating water tank.
- ◆ Moulded case circuit breaker
- ◆ Battery and battery cable
- ◆ Float battery charger
- ◆ Base frame with vibration isolator
- ◆ Daily fuel tank
- ◆ Exhaust elbow, exhaust bellows, exhaust muffler
- ◆ Fuel filter, oil filter, air filter
- ◆ Tool kits
- ◆ Plastic membrane packing
- ◆ English testing report, quality certificate, service manual and warranty card

Optional Supply Scope:

- ◆ Water jacket pre-heater
- ◆ Fuel and water separator
- ◆ Fuel pre-heater
- ◆ External daily fuel tank
- ◆ ATS
- ◆ Synchronization system
- ◆ Standard container
- ◆ Rain-proof canopy
- ◆ Sound-proof canopy
- ◆ Trailer



Binshi Sales Promise

1. **Pre-sales service:** Our professional engineers give **reasonable suggestions** about selection, room design to all the technical solutions.
2. **Selling service:** we provide the **technical support** for the genset installation, test, room noise reduction, dust pollution ect.
3. We have **24 hours Standby** after-sales engineers and **sufficient original plant components** system.
4. **Quality Warranty** is according to our standard conditions: 12 months from BL date or 1,000 running hours. (whichever comes first.)

